

MAIN LANDING GEAR ACCESS STAND FIXED HEIGHT

Product Group 8064
330MLG-FX-LH



NIJL Aircraft Docking
Punterweg 4
8042 PB Zwolle
The Netherlands

T +31 38 202 80 20
E info@nijlgroup.com

www.nijlgroup.com

CAGE code: H2BL2



NIJL[®]
aircraft docking

MAIN LANDING GEAR ACCESS INSPECTIONS AND MAINTENANCE

Product Group 8064 (LH side version only)

Performing maintenance, inspections and lubrication to the landing gear is challenging because of the limited space you have. NIJL developed special access stands to get optimal access to the landing gear braces and shock strut, so the maintenance engineer can safely service the main landing gear inspection zone.

Key Benefits

- + For Airbus A330 aircraft on wheels
- + Large working platform for two persons and toolboxes
- + Optimal access to the working platform on two sides of the platform
- + Easy access up to the top of wing wheel well compartment
- + Optimal fall protection and perfect fit to the aircraft due to the adjustable railing system

Features

- + The Main Landing Gear stands are available as a set; left side (8064) and right side (8065).
- + The stands consist of two separate parts for ease of positioning around the main landing gear strut
- + Slidable railing included for fall protection
- + Foldable floor plate for ease of positioning and fall protection around the main landing gear strut
- + Marine plywood flooring with non-skid surface
- + Rubber padding to protect aircraft skin
- + Swivel wheels for easy positioning
- + Minimum footprint


Specifications

- + Functional dimensions : approx. 4100 x 2650 mm
- + Platform floor height : 2400 mm
- + Max load : 250 kg. (1 person per step, with max. 2 persons on the stair flight or platform)
- + Product weight : approx. 550 kg.


Other platform dimensions and aircraft combinations upon request



Main Landing Gear Stand

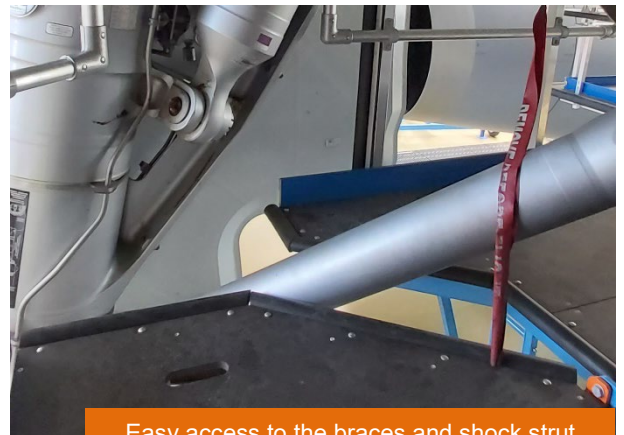

Easy access to the braces and shock strut

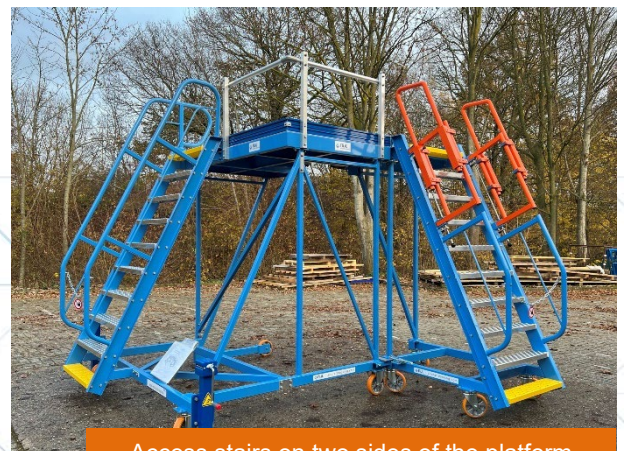

Access stairs on two sides of the platform