


# FIXED HEIGHT STAIRS (8031)



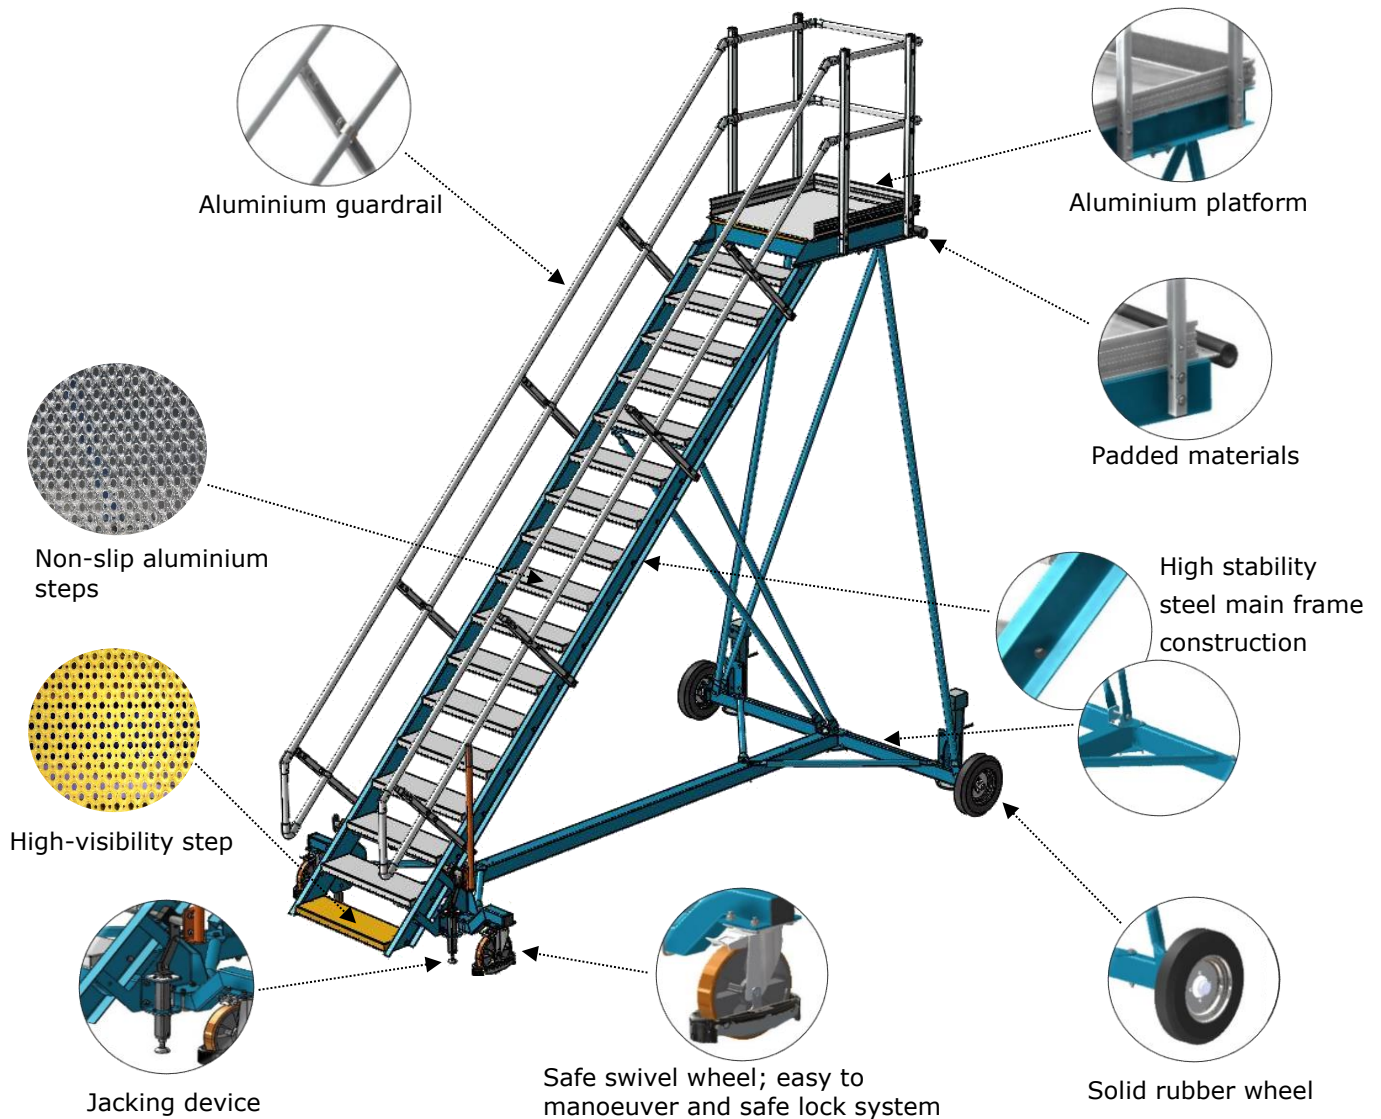


*Fixed Height Stairs with tapered platform to access the stub wing pylon*

## Key Benefits

- Ideal for fast access to areas with limited space
- Fast jacking device
- Strong and stabilized, but also lightweight construction because of optimal mix of steel and aluminium
- Easy to manoeuvre
- Available in different heights from 7 to 24 steps

# Dimensions and footprint

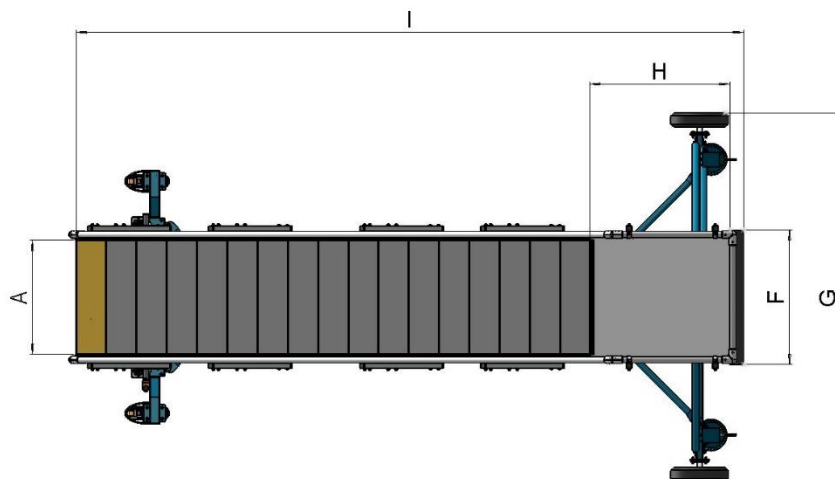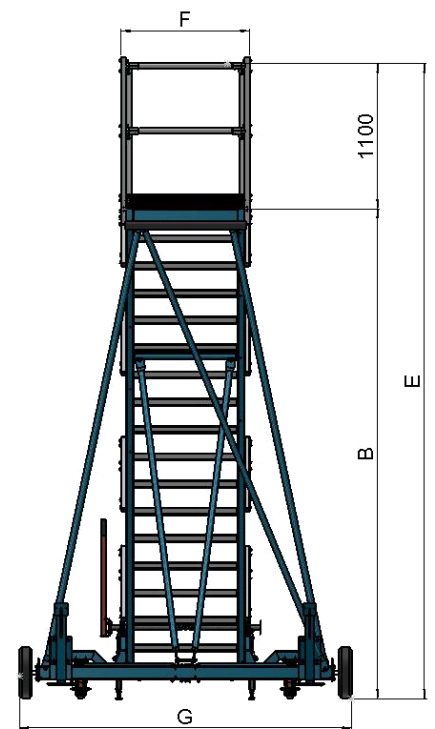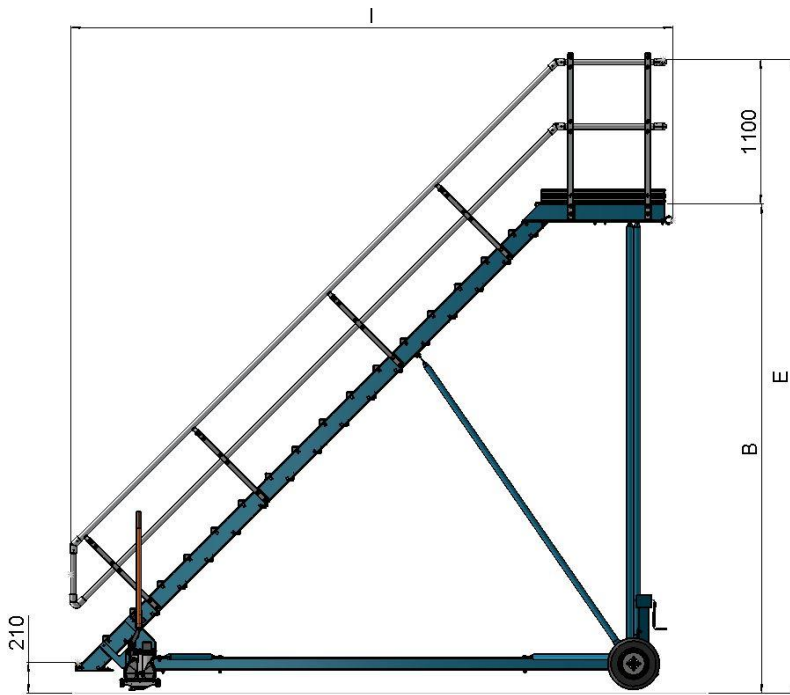

## Dimensions and footprint

STAIRS	A	B	C	D	E	F	G	H	I	Weight kg
<b>8031-FIX07T800</b>	800	1470	-	-	2625	1020	1760	1000	2260	273
<b>8031-FIX08T800</b>	800	1680	-	-	2835	1020	1760	1000	2470	287
<b>8031-FIX09T800</b>	800	1890	-	-	3045	1020	1760	1000	2680	305
<b>8031-FIX10T800</b>	800	2100	-	-	3255	1020	1760	1000	2890	319
<b>8031-FIX11T800</b>	800	2310	-	-	3465	1020	1760	1000	3100	333
<b>8031-FIX12T800</b>	800	2520	-	-	3675	1020	1760	1000	3310	346
<b>8031-FIX13T800</b>	800	2730	-	-	3885	1020	1760	1000	3520	360
<b>8031-FIX14T800</b>	800	2940	-	-	4095	1020	2560	1000	3730	425
<b>8031-FIX15T800</b>	800	3150	-	-	4305	1020	2560	1000	3940	439
<b>8031-FIX16T800</b>	800	3360	-	-	4515	1020	2560	1000	4150	454
<b>8031-FIX17T800</b>	800	3570	-	-	4725	1020	2560	1000	4360	468
<b>8031-FIX18T800</b>	800	3780	-	-	4935	1020	2560	1000	4570	484
<b>8031-FIX19T800</b>	800	3990	-	-	5145	1020	2560	1000	4780	499
<b>8031-FIX20T800</b>	800	4200	-	-	5355	1020	2560	1000	4990	515
<b>8031-FIX21T800</b>	800	4410	-	-	5565	1020	2560	1000	5200	530
<b>8031-FIX22T800</b>	800	4620	-	-	5775	1020	2560	1000	5410	546
<b>8031-FIX23T800</b>	800	4830	-	-	5985	1020	2560	1000	5620	561
<b>8031-FIX24T800</b>	800	5040	-	-	6195	1020	2560	1000	5830	577



# Specifications

GENERAL	
Access to	Nose, Fuselage, Wing, Engine, Horizontal & Vertical Tail
Aircraft type	B737 (MAX), B747, B757, B767, B777 & B787 A220 (former C-Series), A320 family (NEO), A330 (NEO), A340, A350 & A380, E170, E175, E190 & E195 (E2)
In- outdoor usage	Indoor (hangar) and Outdoor (apron) usage
Movability	Movable by 1 - 2 person(s)
Signage	Labels and text plates
Standards	NEN-EN-ISO-14122 (2016)
Type NIJL	FIX
MATERIAL	
Colour	RAL 5012 / RAL 5017 (Standard, other colours optional)
Main construction	Steel (RAL 5012 light blue or galvanized)
Hand railing	Aluminium (RAL 2004 orange for moving parts)
Padding	Soft black rubber protection
Platform flooring	Aluminium, tear plate
Steps	Aluminium, non-slip, trip hazard RAL 1023 yellow
Wheels	Low Speed, max. 5 km/h (optional High Speed)
TECHNICAL	
Platform height (fixed)	See table
Handrailing height	Fixed on the platform / 1100mm on the stairs
Inclination	45 degrees
Max. load	1 person per step and max. 250 kg on the entire stair/platform
Number of steps	See table
Platform dimensions (WxD)	900mm x 1000mm standard (optional 2000 x 1000 mm, 3000 x 1500 mm)
Step width	800mm standard
Weight	See table
<i>Stairs available in various configurations. Please consult NIJL for exact specifications and clarifications</i>	



*Fixed Height Stairs with large platform to access PAX Door*

**NIJL Aircraft Docking 2.0 B.V.**  
 Punterweg 4, 8042 PB Zwolle  
 The Netherlands

**T: +31 38 202 8020**

**E: [info@aircraftdocking.com](mailto:info@aircraftdocking.com)**

**[www.aircraftdocking.com](http://www.aircraftdocking.com)**